

MULTI-CARTRIDGE HOUSINGS



4 & 5 ROUND CARTRIDGE HOUSINGS

SWT offers a complete line of four and five round multi-cartridge housing models to accommodate a wide range of flow rates. Available in 1, 2, 3, or 4-high stack configurations, the standard models all feature stainless steel construction with poly-coat finish, easy access covers for quick change-outs, and FDA grade Buna-N gaskets. A variety of pipe connection styles and sizes are available to match your application.



FEATURES

- Designed for industrial and commercial filtration needs
- Design pressure: 150 psig (10.3 bar) @ 300°F (149°C)
- Heavy duty stainless steel construction for durability
- Band clamp or swing bolt closures for quick cartridge change-outs
- Pipe fittings readily accessible for easy installation
- Knife edge seals eliminate bypass on DOE cartridges
- Adjustable top plate accepts variable length cartridges
- Wide range of options to meet specific filtration and installation requirements

OPTIONS & ADD-ONS

Closure Style: V-Band Clamp or Swing Bolt

Material: 304L Stainless Steel or 316L Stainless Steel

Cartridge Type: Double Open Ended Style (Standard), 222 Style (with Adapter), or 226 Style (with Adapter)

Connections: 2" MNPT (Standard), 1.5" MNPT, 2" or 1.5" FNPT, 2" or 1.5" BSPT, 2" or 1.5" BSPF, 2" or 1.5" Flange, 2" or 1.5" Ferrules, 2" or 1.5" Grooved Fittings

Finish: Poly Coat on Exterior Surfaces (Standard), Electro-Polished, Glass Bead, or Passivate

Extras: Tabs, Legs, Heavy Duty Legs, Gauge Ports, Gauge Ports with Pressure Gauges, Universal Parts

Gasket: Buna N (Standard), EPR, Silicone, Viton, or Teflon Encapsulated Silicone



Adjustable top plate accepts variable length cartridges

Part Number	Cartridges			Flow Rate GPM **	Connection Size			Shipping Weight Lb.	
	Number Per Unit	Length Inches *	Maximum Diameter		Pipe MNPT	Drain FNPT	Vent FNPT	Clamp Style	Swing Bolt Style
YH22704	4	10	2.75	28	2	0.5	0.25	25	62
YH22708	4	20	2.75	56	2	0.5	0.25	31	68
YH22712	4	30	2.75	84	2	0.5	0.25	38	74
YH22716	4	40	2.75	112	2	0.5	0.25	45	80
YH22705	5	10	2.75	35	2	0.5	0.25	26	64
YH22710	5	20	2.75	70	2	0.5	0.25	32	70
YH22715	5	30	2.75	105	2	0.5	0.25	39	76
YH22720	5	40	2.75	140	2	0.5	0.25	46	82


* Equivalent lengths accepted: 10 inch = (9.75 or 10 inch); 20 inch = (19.5 or 20 inch); 30 inch = (29.25 or 30 inch); 40 inch = (39 or 40 inch)

** Based on 7 gpm per 10 inch length with a 25 micron wound cartridge at 2 psid clean and a viscosity of 1 cps. Flow rates are for guidelines only. Actual flow rates are based on fluid, viscosity, cartridge type, micron ratings, and other factors.


MULTI-CARTRIDGE HOUSINGS




4 & 5 ROUND CARTRIDGE HOUSINGS

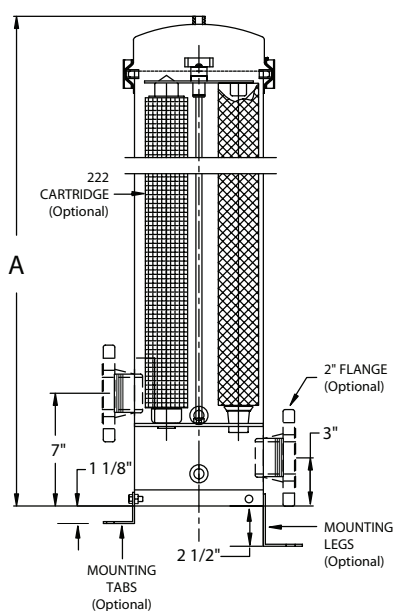

CLAMP STYLE

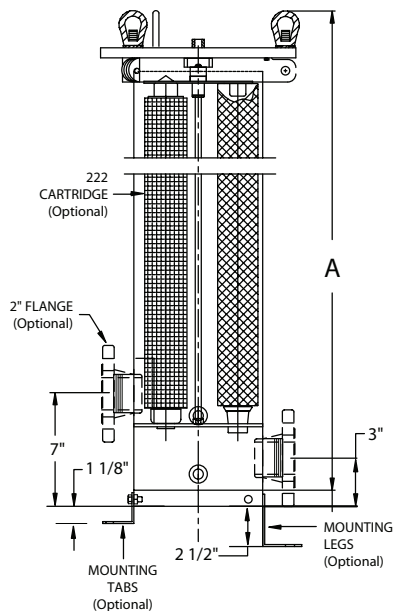

SWING BOLT STYLE

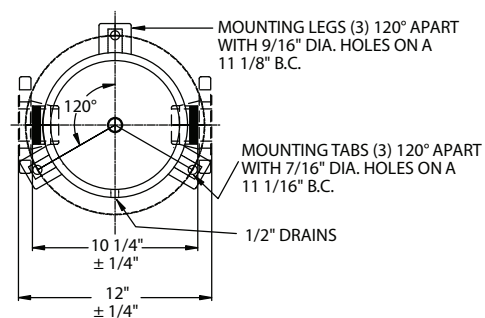

PART NUMBER	CLAMP STYLE	SWING BOLT STYLE
	DIM. A	DIM. A
YH22704	20 7/8"	22 1/4"
YH22708	30 7/8"	32 1/4"
YH22712	40 7/8"	42 1/4"
YH22716	50 7/8"	52 1/4"
YH22705	20 7/8"	22 1/4"
YH22710	30 7/8"	32 1/4"
YH22715	40 7/8"	42 1/4"
YH22720	50 7/8"	52 1/4"



Mounting tabs
(may be installed at site)



Sanitary fittings



Gauge port assembly
with mounting legs



Electro-polish