

ULTRAVIOLET SYSTEMS




UVL SERIES ULTRAVIOLET SYSTEMS COMMERCIAL / INDUSTRIAL

SWT's UVL Series Ultraviolet Systems provide proven and guaranteed performance in ultraviolet water treatment for a wide range of commercial and industrial applications. These systems are specifically intended for applications requiring low flows to high flows for disinfection, ozone destruction, and TOC reduction. Each system is engineered to provide optimized flow and retention time to reduce bacteria by up to 99.9%. With dosage levels of 30 mJ/cm² or higher at rated flow, these units assure effective UV treatment.


Features

- Disinfection, ozone destruction, or TOC reduction
- Processes up to 1600 gpm for clear fresh water and DI/RO water
- 316L stainless steel treatment chamber—electropolished and passivated interior/exterior
- 150 psi maximum operating pressure
- Remote power enclosure with viewing window—polycarbonate or 304 stainless steel
- Monitoring port, sample port, drain port
- Elapsed run time meter
- 2, 3, 4, 6, or 8 inch flange inlet/outlet connections (model dependent)
- Low pressure, high output or amalgam UV lamp with 10,000 hour lamp life—254nm or 185nm
- UV dosage of 30 mJ/cm² or higher at rated flow
- Horizontal or vertical mounting (model dependent)
- Custom systems and features are available to meet specific specifications and industry requirements.

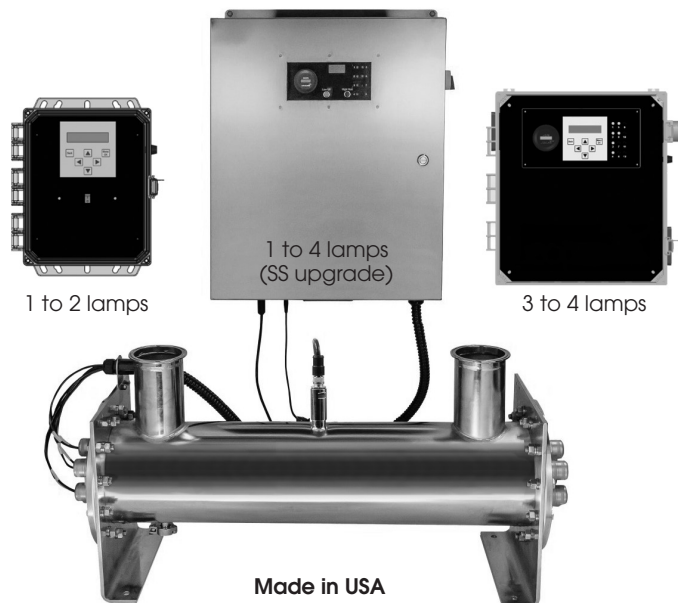

Options

- Monitoring station with UV intensity, 4-20mA linear output, and high heat shutoff
- Monitor 0-100% UV intensity display, 4-20mA linear output
- High heat shutoff
- Sanitary inlet/outlet connections
- Manual quartz sleeve wiper system (model dependent)
- Lamp out alert
- Hands off auto (HOA) switch
- 220V/240V 50-60Hz

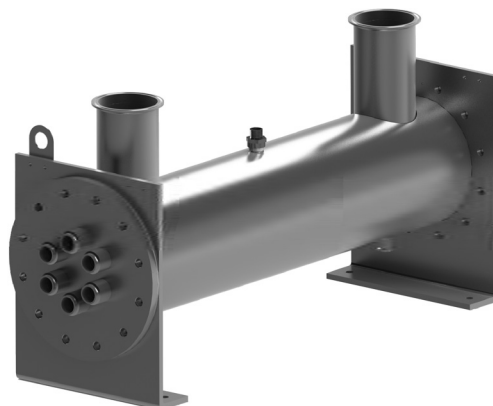

ULTRAVIOLET SYSTEMS



UVL SERIES ULTRAVIOLET SYSTEMS COMMERCIAL / INDUSTRIAL

Part Number	Inlet/Outlet Connections	Number of Lamps	Total Lamp Watts	UV Dosage* mJ/cm ²		Flow Rate		Chamber Diameter
				Clear, Fresh Water	RO/DI Water	Clear, Fresh Water	RO/DI Water	

UVL High Output Series Ultraviolet Systems (30 inch Short Systems)

UVL1S-2F	2 inch Flange	1	80 W	30 @ 95% UVT	30 @ 99% UVT	35 gpm	40 gpm	6 inch
UVL1S-2S	2 inch Sanitary							
UVL2S-2F	2 inch Flange	2	160 W	30 @ 95% UVT	30 @ 99% UVT	70 gpm	84 gpm	6 inch
UVL2S-2S	2 inch Sanitary							
UVL3S-3F	3 inch Flange	3	240 W	30 @ 95% UVT	30 @ 99% UVT	115 gpm	135 gpm	6 inch
UVL3S-3S	3 inch Sanitary							
UVL4S-3F	3 inch Flange	4	320 W	30 @ 95% UVT	30 @ 99% UVT	150 gpm	180 gpm	6 inch
UVL4S-3S	3 inch Sanitary							

UVL High Output Series Ultraviolet Systems (60 inch Long Systems)

UVL4L-4F	4 inch Flange	4	540 W	40 @ 95% UVT	40 @ 99% UVT	275 gpm	320 gpm	6 inch
UVL4L-4S	4 inch Sanitary							
UVL4L-6F	6 inch Flange	4	540 W	40 @ 95% UVT	40 @ 99% UVT	400 gpm	480 gpm	8 inch
UVL4L-6S	6 inch Sanitary							
UVL5L-4F	4 inch Flange	5	675 W	40 @ 95% UVT	40 @ 99% UVT	350 gpm	400 gpm	6 inch
UVL5L-4S	4 inch Sanitary							
UVL5L-6F	6 inch Flange	5	675 W	40 @ 95% UVT	40 @ 99% UVT	500 gpm	600 gpm	8 inch
UVL5L-6S	6 inch Sanitary							
UVL6L-6F	6 inch Flange	6	810 W	40 @ 95% UVT	40 @ 99% UVT	600 gpm	720 gpm	8 inch
UVL6L-6S	6 inch Sanitary							

* NOTE: 30 mJ/cm² = 30,000 µJ/cm² (30 millijoules per square centimeter = 30,000 microjoules per square centimeter)

40 mJ/cm² = 40,000 µJ/cm² (40 millijoules per square centimeter = 40,000 microjoules per square centimeter)

ULTRAVIOLET SYSTEMS



UVL SERIES ULTRAVIOLET SYSTEMS COMMERCIAL / INDUSTRIAL

Part Number	Inlet/Outlet Connections	Number of Lamps	Total Lamp Watts	UV Dosage* mJ/cm ²		Flow Rate		Chamber Diameter
				Clear, Fresh Water	RO/DI Water	Clear, Fresh Water	RO/DI Water	

UVL Amalgam Series Ultraviolet Systems (30 inch Short Systems)

UVL1SA-2F	2 inch Flange	1	135 W	30 @ 95% UVT	30 @ 99% UVT	75 gpm	85 gpm	6 inch
UVL1SA-2S	2 inch Sanitary							
UVL2SA-2F	2 inch Flange	2	270 W	30 @ 95% UVT	30 @ 99% UVT	130 gpm	145 gpm	6 inch
UVL2SA-2S	2 inch Sanitary							
UVL3SA-3F	3 inch Flange	3	405 W	30 @ 95% UVT	30 @ 99% UVT	225 gpm	225 gpm	6 inch
UVL3SA-3S	3 inch Sanitary							
UVL3SA-4F	4 inch Flange	3	405 W	30 @ 95% UVT	30 @ 99% UVT	300 gpm	365 gpm	8 inch
UVL3SA-4S	4 inch Sanitary							
UVL4SA-3F	3 inch Flange	4	540 W	40/30 @ 95% UVT	40/30 @ 99% UVT	225 gpm	225 gpm	6 inch
UVL4SA-3S	3 inch Sanitary							
UVL4SA-6F	6 inch Flange	4	540 W	40/30 @ 95% UVT	40/30 @ 99% UVT	450 gpm	525 gpm	8 inch
UVL4SA-6S	6 inch Sanitary							
UVL5SA-6F	6 inch Flange	5	675 W	30 @ 95% UVT	30 @ 99% UVT	600 gpm	720 gpm	8 inch
UVL5SA-6S	6 inch Sanitary							

UVL Amalgam Series Ultraviolet Systems (60 inch Long Systems)

UVL4LA-6F	6 inch Flange	4	1280 W	30 @ 95% UVT	40 @ 99% UVT	750 gpm	900 gpm	8 inch
UVL4LA-6S	6 inch Sanitary							
UVL4LA-8F	8 inch Flange	4	1280 W	30 @ 95% UVT	40 @ 99% UVT	1200 gpm	1400 gpm	10 inch
UVL4LA-8S	8 inch Sanitary							
UVL5LA-6F	6 inch Flange	5	1600 W	30 @ 95% UVT	30 @ 99% UVT	875 gpm	1025 gpm	8 inch
UVL5LA-6S	6 inch Sanitary							
UVL5LA-8F	8 inch Flange	5	1600 W	30 @ 95% UVT	40 @ 99% UVT	1600 gpm	1600 gpm	10 inch
UVL5LA-8S	8 inch Sanitary							
UVL6LA-6F	6 inch Flange	6	1920 W	30 @ 95% UVT	30 @ 99% UVT	1050 gpm	1050 gpm	8 inch
UVL6LA-6S	6 inch Sanitary							

* NOTE: 30 mJ/cm² = 30,000 µJ/cm² (30 millijoules per square centimeter = 30,000 microjoules per square centimeter)

40 mJ/cm² = 40,000 µJ/cm² (40 millijoules per square centimeter = 40,000 microjoules per square centimeter)